




MECHANICAL

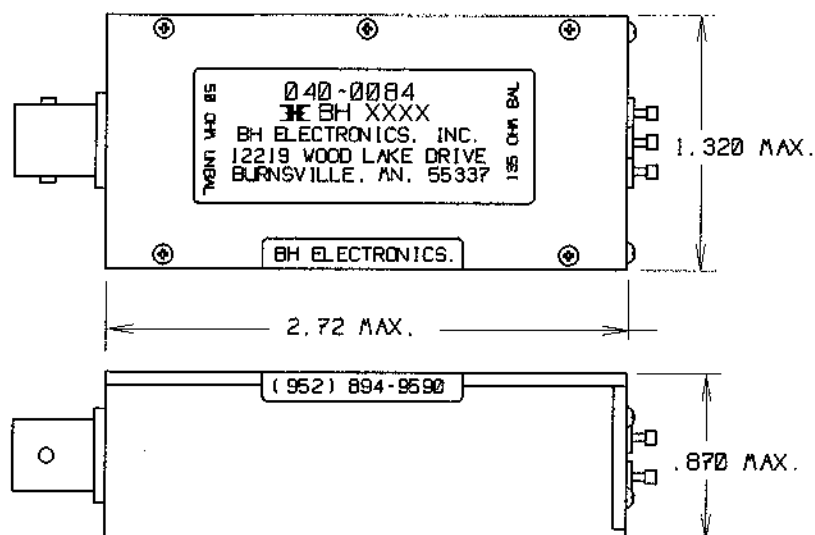

SCHEMATIC

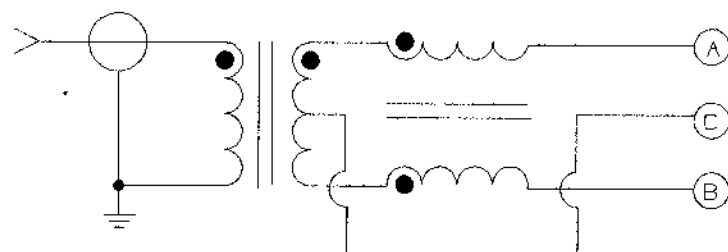

ELECTRICAL SPECIFICATIONS

- INSERTION LOSS: 1dB MAX 200Hz - 12MHz
- RETURN LOSS: (BI-DIRECTIONAL)
17.5dB MIN 200Hz - 500Hz
20dB MIN 500Hz - 12MHz
- COMMON-MODE REJECTION: 50dB MIN 200Hz - 12MHz

DESIGNED PER:

BH CATALOG

DRAWN: K. LOFTUS

ENGR. N. DOOSE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES. TOLERANCES
NON-CUMULATIVE.

.XX ± .01
.XXX ± .005

SCALE 1:

SHEET 1 / 1



BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

©1998 BH Electronics

TITLE

50 : 135 OHM
DSL TEST BALUN

PART NO.

040-0084

				DESIGNED PER:	
				BH CATALOG	
				DRAWN: K. LOFTUS	
				ENGR. N. DOOSE	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES. TOLERANCES NON-CUMULATIVE.	
				.XX ± .01 .XXX ± .005	
A	3-21-00	CUSTOMER PRINT (010122-4)	10/5/00	SCALE 1:	SHEET 1 / 1
ISSUE	DATE	REVISIONS			