



MECHANICAL

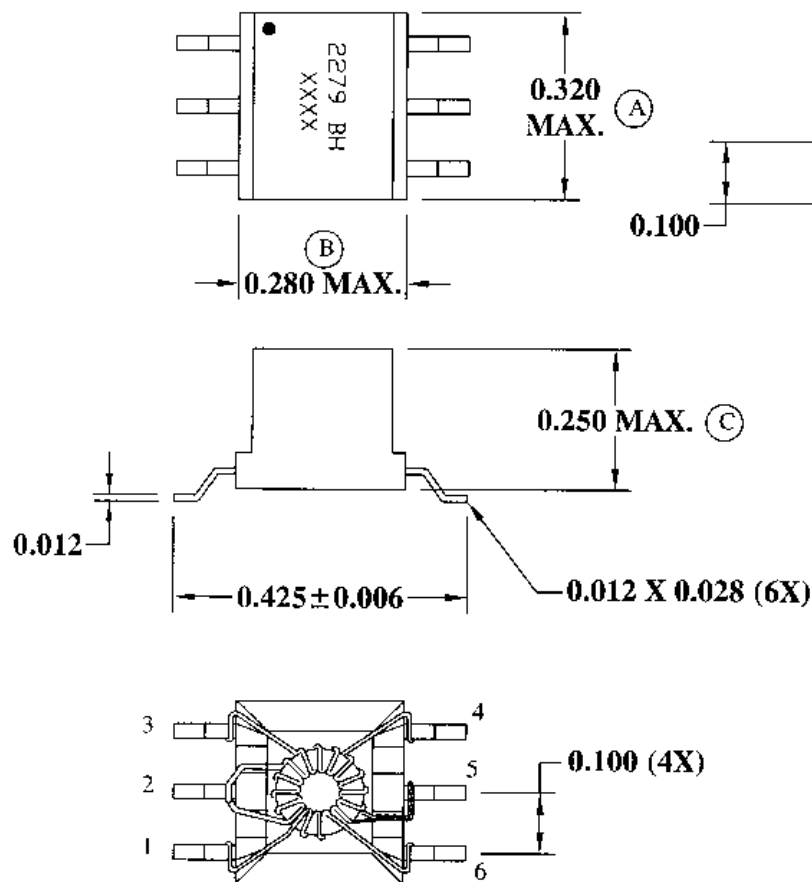

FOOTPRINT

SCHEMATIC

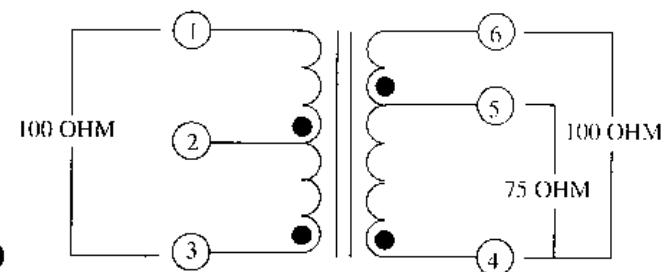

ELECTRICAL SPECIFICATIONS

IMPEDANCE RATIO: 75:100 (4-5:1-3) OR 100:100 (4-6:1-3)

HIGH VOLTAGE TEST: 2500 VAC / 1 SEC.

INSERTION LOSS: <1 dB 5 MHz-50 MHz (BOTH IMPEDANCES)

RETURN LOSS: >15dB 5 MHz-30 MHz (BOTH IMPEDANCES)
>12.5dB 30 MHz - 50 MHz (BOTH IMPEDANCES)

DCR: 0.25 OHMS MAX. (1-3) (4-6)

DESIGN PER:			
CATALOG			
DRAWN: K. LOFTUS			
ENGR: B. GASS			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005			
PAGE 1 OF 1			
ISSUE		DATE	REVISION
BY		BY	

3-8-08 REVISE ELECTRICALS

12-11-01 ADD IMPEDANCE AND TARGETS

7-28-97 NEW CASE

2-12-97 Q9677-1 NOW 500-2279

12-4-96 CUSTOMER PRINT

DESIGN PER:

CATALOG

DRAWN: K. LOFTUS

ENGR: B. GASS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES, TOLERANCES
NON-CUMULATIVE
.XX±.01 .XXX±.005

PAGE 1 OF 1

BH® BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE: DUAL IMPEDANCE TRANSFORMER

PART NO. 500-2279