

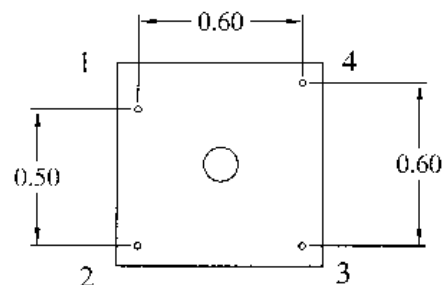
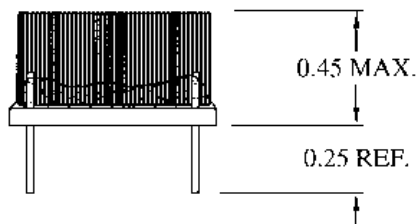


MECHANICAL

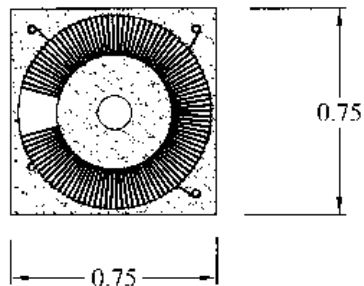

SCHEMATIC



ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 100mH MIN. (1-2) (4-3)

DC RESISTANCE: 2.25 OHMS MAX. (1-2) (4-3)

HIGH VOLTAGE TEST: 2500 VAC / 1 SEC. (1-4)

IMPEDANCE RATIO: 75 OHM; 100 OHM

INSERTION LOSS: <3dB 30Hz - 10 MHz

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				☐ CUSTOM NON-PROPRIETARY ☒	
				DRAWN: K. LOFTUS	
				ENGR: B. GASS	
B	1-6-10	Q12582 NOW 500-3118		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE:
A	5-10-09	CUSTOMER PRINT	BG		PART NO.
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1	TRANSFORMER 500-3118