



MECHANICAL

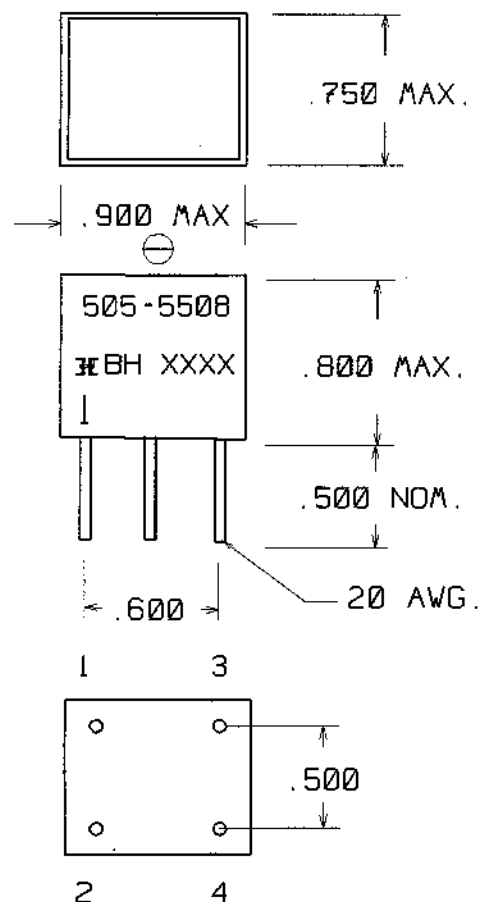

SCHEMATIC



ELECTRICAL SPECIFICATIONS

TURNS RATIO: 2:1

OPEN CIRCUIT INDUCTANCE: 1.0mH MIN. (1-2)
1 KHz 100mVPRIMARY LEAKAGE INDUCTANCE: 40μH MAX.
(1-2 SHORT 3-4)INTERWINDING CAPACITANCE: 30pF MAX.
(1-2 TO 3-4)

HIGH VOLTAGE TEST: 2500 VRMS / 1 SEC.

ET CONSTANT: 90Vμ SEC. MIN.

				DESIGNED PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN ©1998 BH Electronics
				BH CATALOG	
				DRAWN: K. LOFTUS	
				ENGR.	
				UNLESS OTHERWISE SPECIFIED; DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE.	TITLE
				XX±.01 XXX±.005	SCR TRIGGER TRANSFORMER
A	8-16-99	CUSTOMER PRINT			PART NO.
ISSUE	DATE	REVISIONS		SCALE 1:1.1	505-5508
				SHEET 1 / 1	