

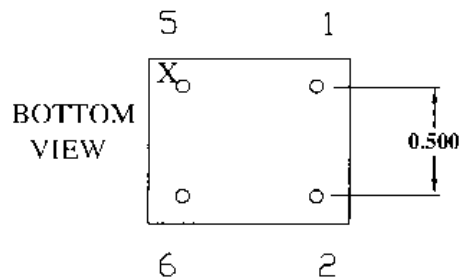


MECHANICAL

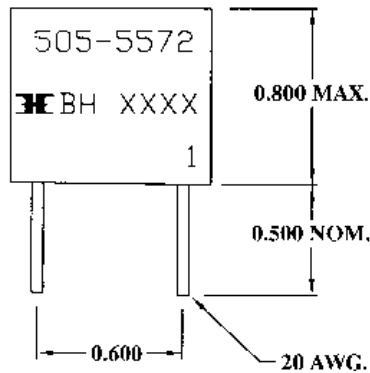

NOTE: "X" ON BOTTOM OF CASE INDICATES PIN 5.

SCHEMATIC

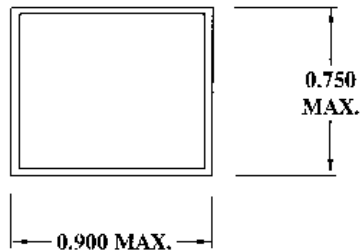

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 1.0mH MIN. (1-5)

PRIMARY LEAKAGE INDUCTANCE: 20μH MAX.

INTERWINDING CAPACITANCE: 30pF MAX.

DC RESISTANCE: 2.0 OHMS MAX.

HIGH VOLTAGE TEST: 2500 VRMS

ET CONSTANT: 90 Vμ SEC. MIN.

				DESIGN PER:	BH CATALOG	 [®] BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN
				☐ CUSTOM	NON-PROPRIETARY ☒	
				DRAWN:	K. LOFTUS	TITLE: TRANSFORMER, SCR
				ENGR:	J. DECRAMER	
B	12-20-06	ECR #7202 UPDATE TO CADD		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO. 505-5572
A	9-18-97	CUSTOMER PRINT	JDC	PAGE 1 OF 1		
ISSUE	DATE	REVISION	BY			