


MECHANICAL



SCHEMATIC

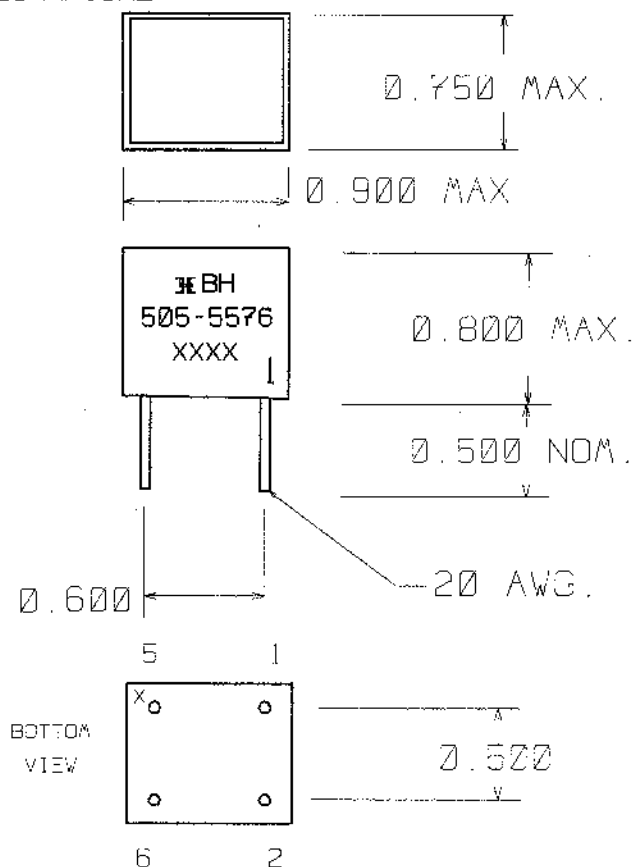

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 20mH MIN. (1-5)

PRIMARY LEAKAGE INDUCTANCE: 200 uH MAX. (1-5 SHORT 2-6)

INTERWINDING CAPACITANCE: 50 pF MAX. (1-5 TO 2-6)

DC RESISTANCE: (1-5) 6.0 OHMS MAX.

(2-6) 6.0 OHMS MAX.

HIGH VOLTAGE TEST: 2500 VRMS / 1 SEC. (2-1)

NOTE: "X" ON BOTTOM OF CASE INDICATES PIN 3

				DESIGNED PER:	 BH ELECTRONICS INC. BURNSVILLE - MARSHALL
				BH CATALOG	
				DRAWN: K. LOFTUS	
				ENGR.	TITLE TRANSFORMER
				UNLESS OTHERWISE SPECIFIED; DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE.	
A	1-24-94	CUSTOMER PRINT			PART NO. 505-5576
ISSUE	DATE	REVISIONS		DO NOT SCALE	SHEET 1 / 1