

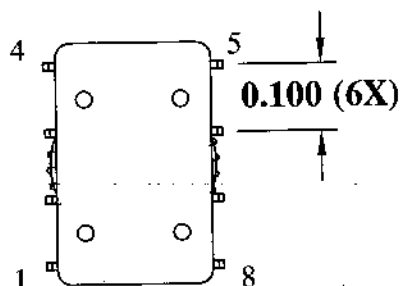
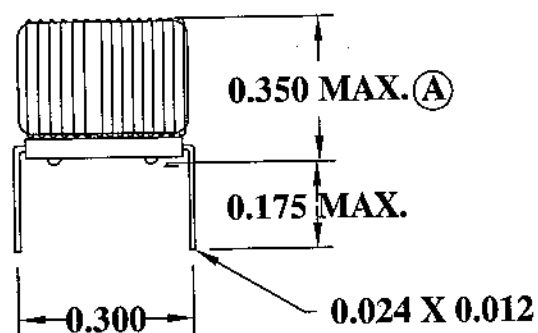


MECHANICAL

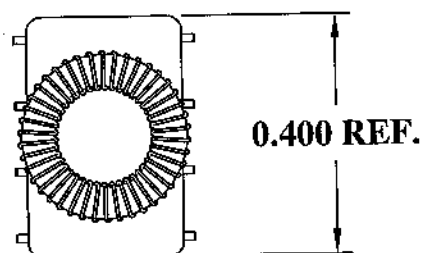

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 21mH MIN. 10 KHz 300mV

PRIMARY LEAKAGE INDUCTANCE: 2μH MAX.

INTERWINDING CAPACITANCE: 100pF MAX.

DC RESISTANCE: 2 OHMS MAX.

HIGH VOLTAGE TEST: 1500 VAC/1 SEC.

ET CONSTANT: 100Vμ SEC. MIN.

RoHS Compliant

				DESIGN PER:		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				BH CATALOG			
				☐ CUSTOM ☒ NON-PROPRIETARY		TITLE: TRANSFORMER	
				DRAWN: K. LOFTUS			
				ENGR: B. MARKS		PART NO. L00-1455	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 XXX±.005			
A	10-11-05	CUSTOMER PRINT	900	PAGE 1 OF 1			
ISSUE	DATE	REVISION	BY				