


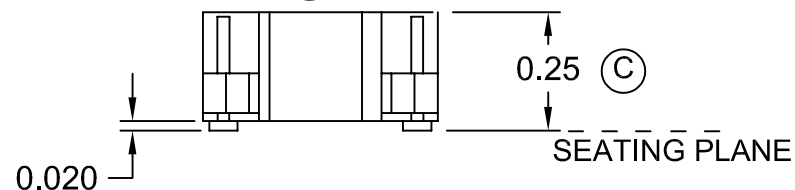


MECHANICAL

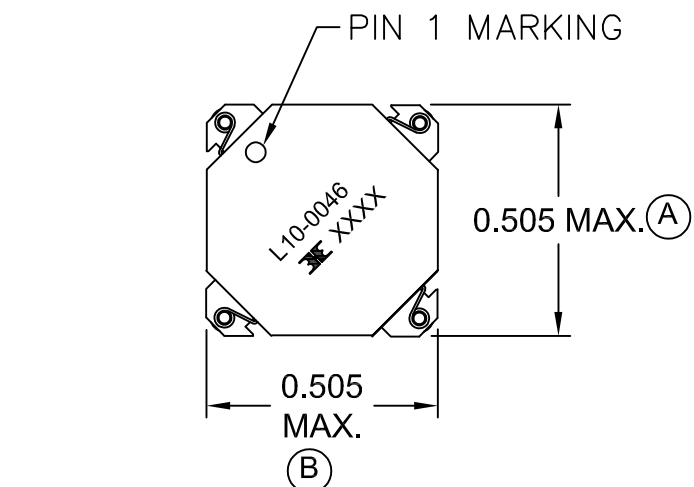


COPLANARITY 0.004"

RECOMMENDED PCB LAYOUT

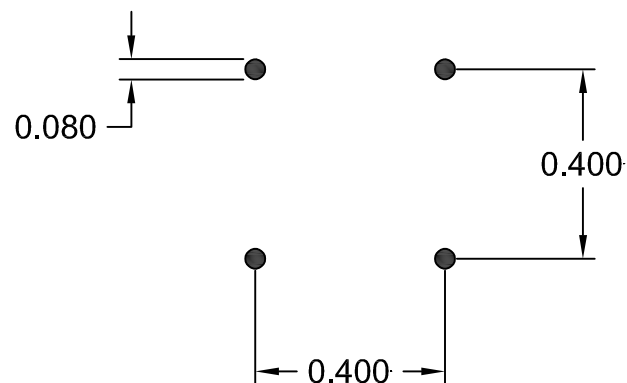

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 75.6mH MIN. @ 0 ADC (1-4) 10 KHz 100mV

PRIMARY LEAKAGE INDUCTANCE: 825nH NOM. (1-4 SH 2, 3)

120 KHz 50mV

INTERWINDING CAPACITANCE: 250pF NOM. (1-2) 120 KHz 50mV

DC RESISTANCE: 3.75 OHMS NOM. (1-4) (2-3)

IR: 5K MEGOHMS MIN. @ 200 VDC (1-2)

RoHS Compliant

DESIGN PER:

BH CATALOG



CUSTOM

NON-PROPRIETARY



DRAWN:

KALANI SA

ENGR:

B. GASS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES, TOLERANCES
NON-CUMULATIVE
.XX±.01 .XXX±.005

PAGE 1 OF 2



BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics



TITLE:

CHOKE

PART NO.

L10-0046

A	5-15-14	CUSTOMER PRINT (Q12909-1)	BG
ISSUE	DATE	REVISION	BY

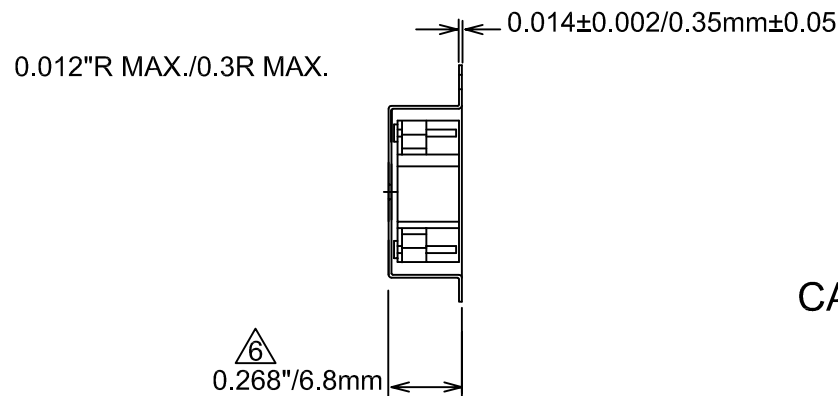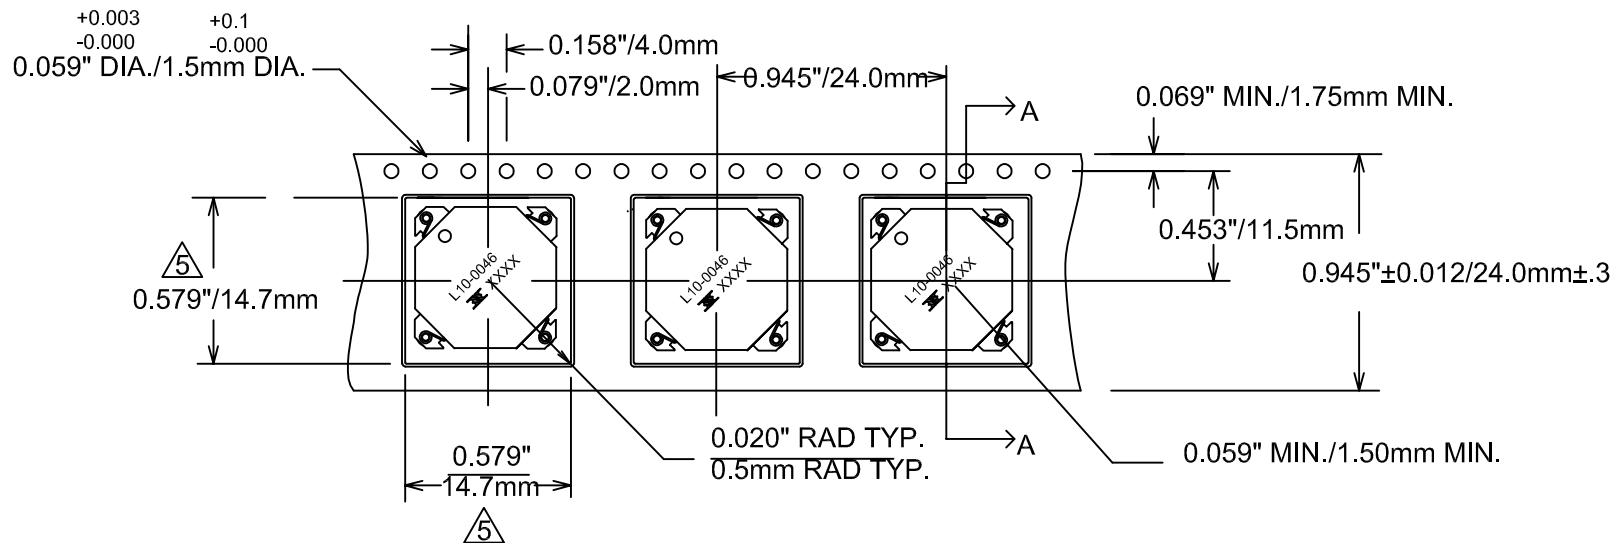

CARRIER TAPE 811-0137

SECTION A-A

				DESIGN PER:	BH CATALOG	 [®] BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				☐ CUSTOM	NON-PROPRIETARY ☒		
				DRAWN: KALANI SA			
				ENGR: B. GASS			
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		TITLE:	CHOKE
A	5-15-14	CUSTOMER PRINT(Q12909-1)	BQ			PART NO.	
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2			