


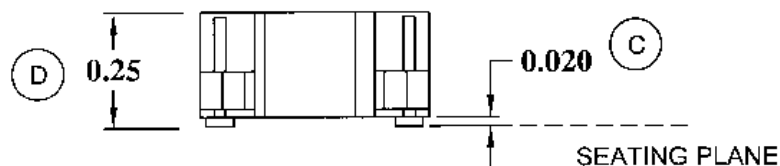



MECHANICAL

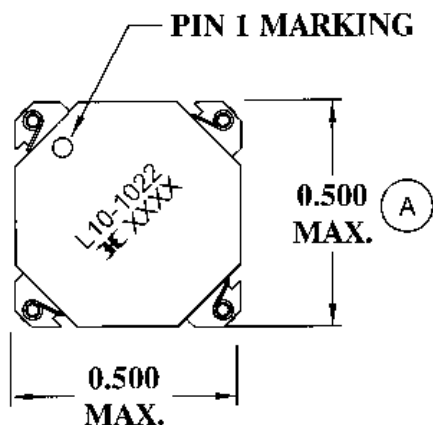

RECOMMENDED PC BOARD LAYOUT

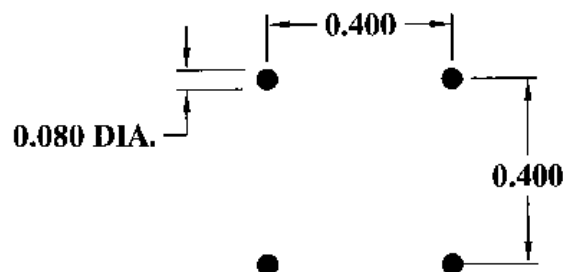

SCHEMATIC

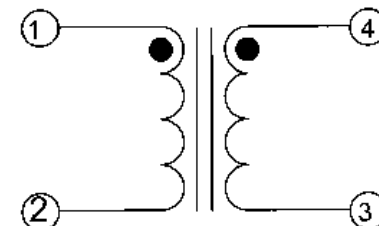

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: (1-2) 23.65 - 35.47 μ H @ 0 ADC 10 KHz 100mV

DC BIAS: (1-2) 23.65 μ H TYP. @ 2.54 ADC 10 KHz 100mV


DC RESISTANCE: (1-2) 0.1184 OHMS NOM.

(3-4) 0.1184 OHMS NOM.

IR: 100 VDC 1K MEGOHMS MIN. (1, 2 - 3, 4)

RoHS Compliant

DESIGNED PER:				BH CATALOG	
				CUSTOM	NON-PROPRIETARY X
				DRAWN Kathy Loftus	
				ENGR. J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX $\pm$.01 .XXX $\pm$.005	
				PAGE 1 OF 2	
				 (R) BH Electronics, Inc. Burnsville & Marshall, MN (C) 1998 BH Electronics	
				TITLE: QTR PAK TM (Switching Regulator)	
				PART NO. L10-1022	
B	10-4-06	REVISE MECHANICAL			
A	8-1-05	CUSTOMER PRINT	JDC		
ISSUE	DATE	REVISION	BY		

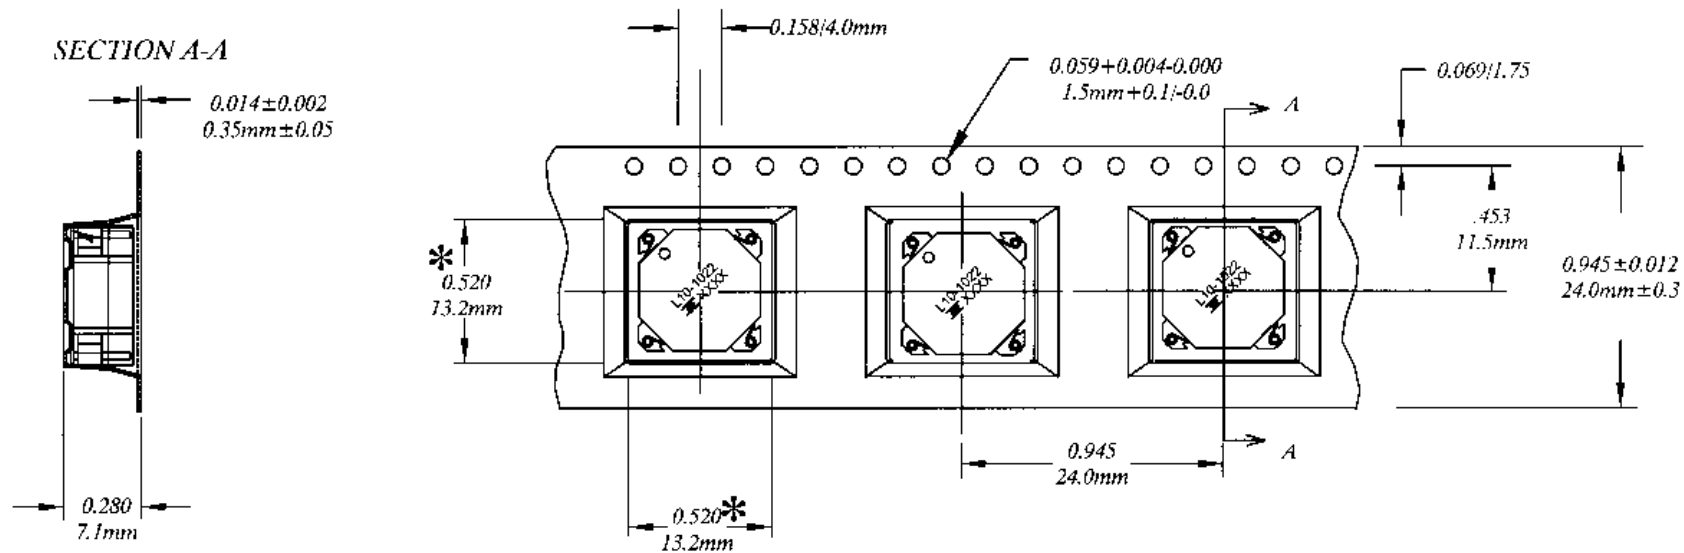

CARRIER TAPE 811-0137

				DESIGNED PER:		
				BH CATALOG		
				☐ CUSTOM ☒ NON-PROPRIETARY		
				DRAWN Kathy Loftus		
				ENGR. J. DECRAMER		
B	10-4-06	REVISE MECHANICALS	JDC	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE.	TITLE:	QTR PAK™ (Switching Regulator)
A	8-1-05	CUSTOMER PRINT	JDC	.XX±.01 .XXX±.005	PART NO.	L10-1022
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2		



® BH Electronics, Inc.
Burnsville & Marshall, MN
© 1998 BH Electronics