



MECHANICAL


PIN 1 MARKING

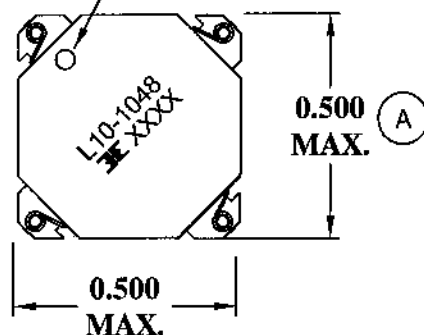

RECOMMENDED PC BOARD LAYOUT

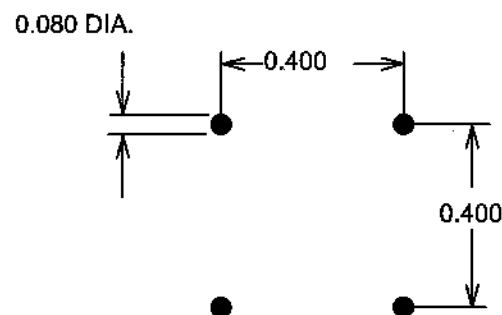

SCHEMATIC

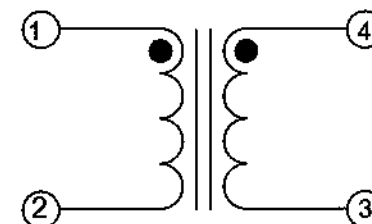

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUTANCE: 218-327uH @ 0 ADC (1, 4 - 2, 3)

217.91uH TYP. @ 0.84 ADC (1, 4 - 2, 3)



10 KHz 100mV

DC RESISTANCE: 1.1567 OHMS NOM. (1-2)


1.1567 OHMS NOM. (4-3)

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

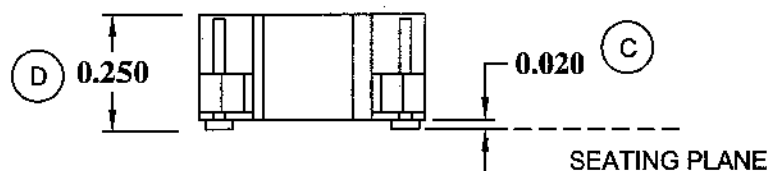

				DESIGNED PER:	 [®] BH Electronics, Inc. Burnsville & Marshall, MN [©] 1998 BH Electronics
				BH CATALOG	
				DRAWN Kathy Loftus	
				ENGR. J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005	TITLE: QTR PAK [™] (Switching Regulator)
A	2-18-98	CUSTOMER PRINT			PART NO. L10-1048
ISSUE	DATE	REVISION		BY	PAGE 1 OF 2

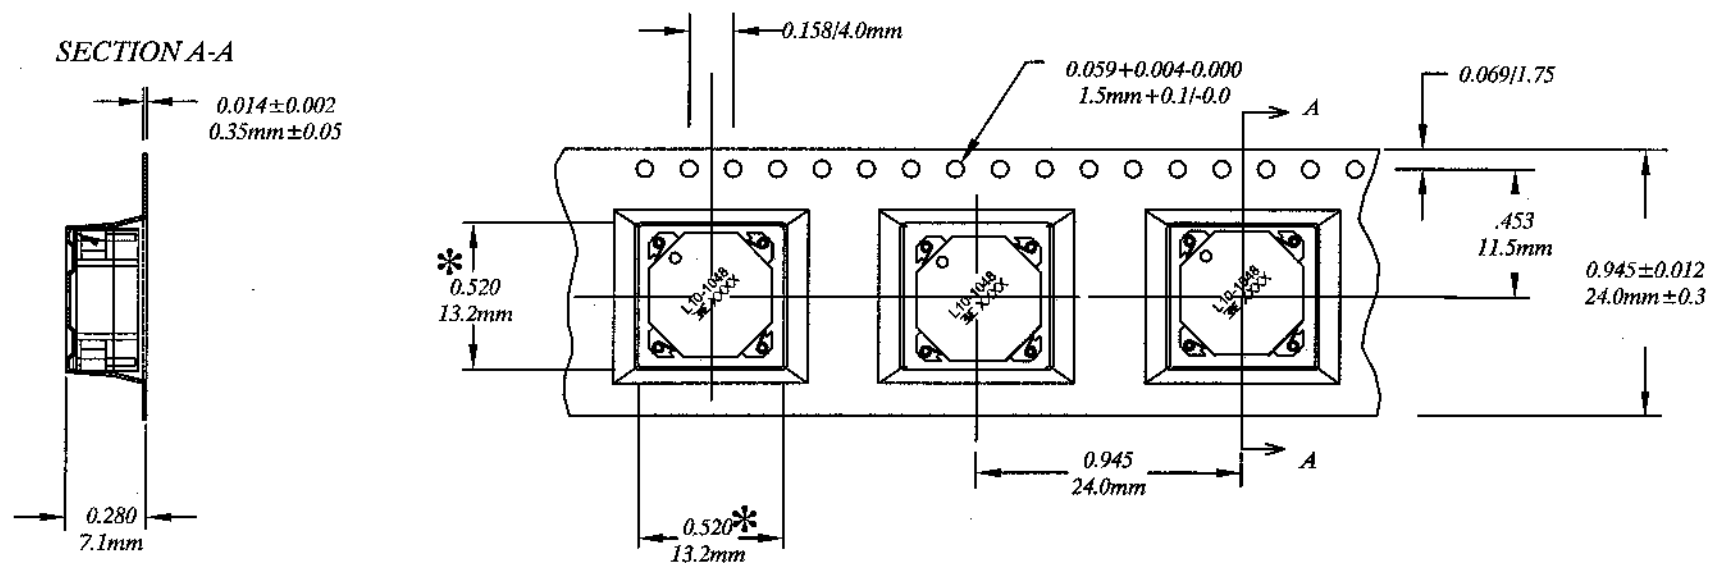

CARRIER TAPE 811-0137

				DESIGNED PER:	 ® BH Electronics, Inc. Burnsville & Marshall, MN © 1998 BH Electronics
				BH CATALOG	
				DRAWN Kathy Loftus	
				ENGR. J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005	
A	8-29-05	CUSTOMER PRINT			TITLE: QTR PAK™ (Switching Regulator)
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	PART NO. L10-1048