


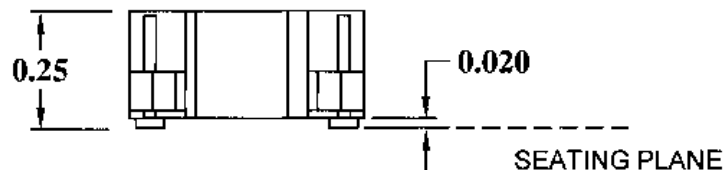


MECHANICAL

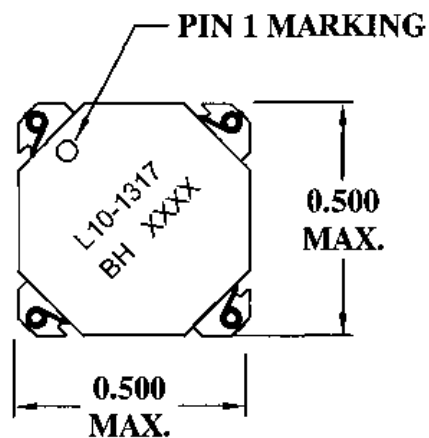


COPLANARITY 0.004"

RECOMMENDED PC BOARD LAYOUT

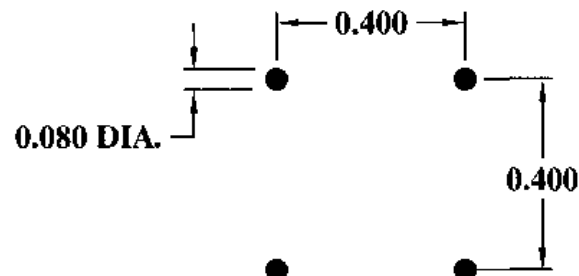

SCHEMATIC

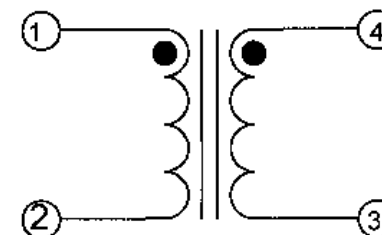

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 13.6 μ H @ 0 ADC 10 KHz 100mV (1-2)

DC BIAS: 10.9 μ H TYP. @ 4.20 ADC 10 KHz 100mV (1-2)

PRIMARY LEAKAGE INDUCTANCE: 0.25 μ H NOM.

DC RESISTANCE: 0.182 OHMS NOM. (1-2) (4-3)

HIGH VOLTAGE TEST: 3000 VAC / 1 SEC. WITH 5 SEC. RAMP-UP (1-4)

RoHS Compliant

DESIGNED PER:

BH CATALOG

CUSTOM

NON-PROPRIETARY

X

DRAWN Kathy Loftus

ENGR. J. DECRAMER

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES, TOLERANCES
NON-CUMULATIVE.

.XX $\pm$.01 .XXX $\pm$.005

PAGE 1 OF 2



®

BH Electronics, Inc.
Burnsville & Marshall, MN

©

1998 BH Electronics

TITLE:

QTR PAK™
(Switching Regulator)

PART NO.

L10-1317

A

2-5-13

CUSTOMER PRINT

ISSUE

DATE

REVISION

BY



				DESIGNED PER:		 [®] BH Electronics, Inc. Burnsville & Marshall, MN [©] 1998 BH Electronics		
				☐ CUSTOM	☒ NON-PROPRIETARY			
				DRAWN Kathy Loftus				
				ENGR. J. DECRAMER				
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005			TITLE:	QTR PAK [™] (Switching Regulator)
A	2-5-13	CUSTOMER PRINT						PART NO.
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2				