

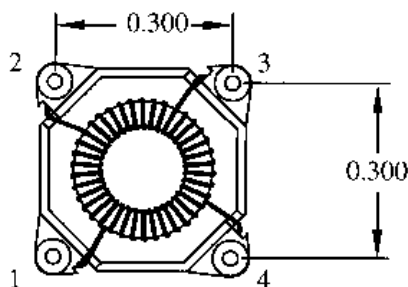
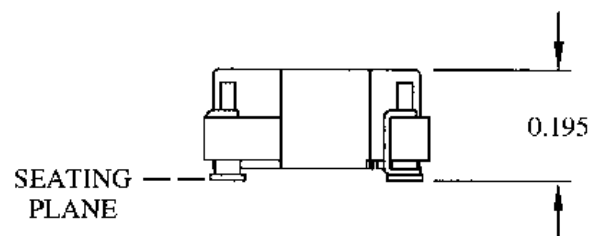



MECHANICAL

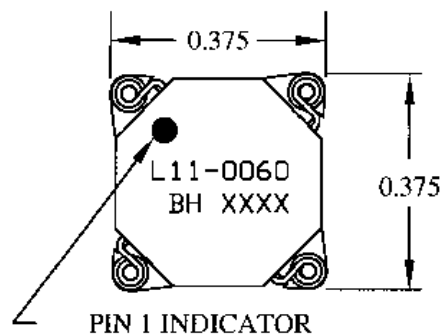

FOOTPRINT

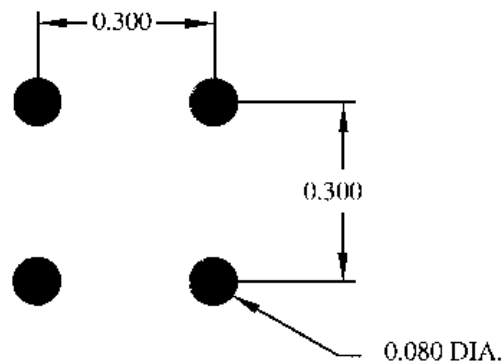

SCHEMATIC

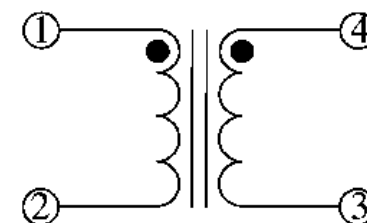

ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 12.70-19.04 μ H @ 0 ADC (1-2) (SH 1, 4) (SH 2, 3)

10 KHz 100mV


DC BIAS: 12.70 μ H TYP. @ 1.52 ADC (1-2) (SH 1, 4) (SH 2, 3) 10 KHz 100mV

DC RESISTANCE: 0.070 OHMS NOM. (1-2) (SH 1, 4) (SH 2, 3)

HIGH VOLTAGE TEST: 1500 VRMS (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN	
					© 1998 BH Electronics	
					TITLE: INDUCTOR	
					PART NO. L11-0060	
A	11-26-08	CUSTOMER PRINT (Q12506)	<i>g.c.</i>	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX $\pm$.01 .XXX $\pm$.005		
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2		

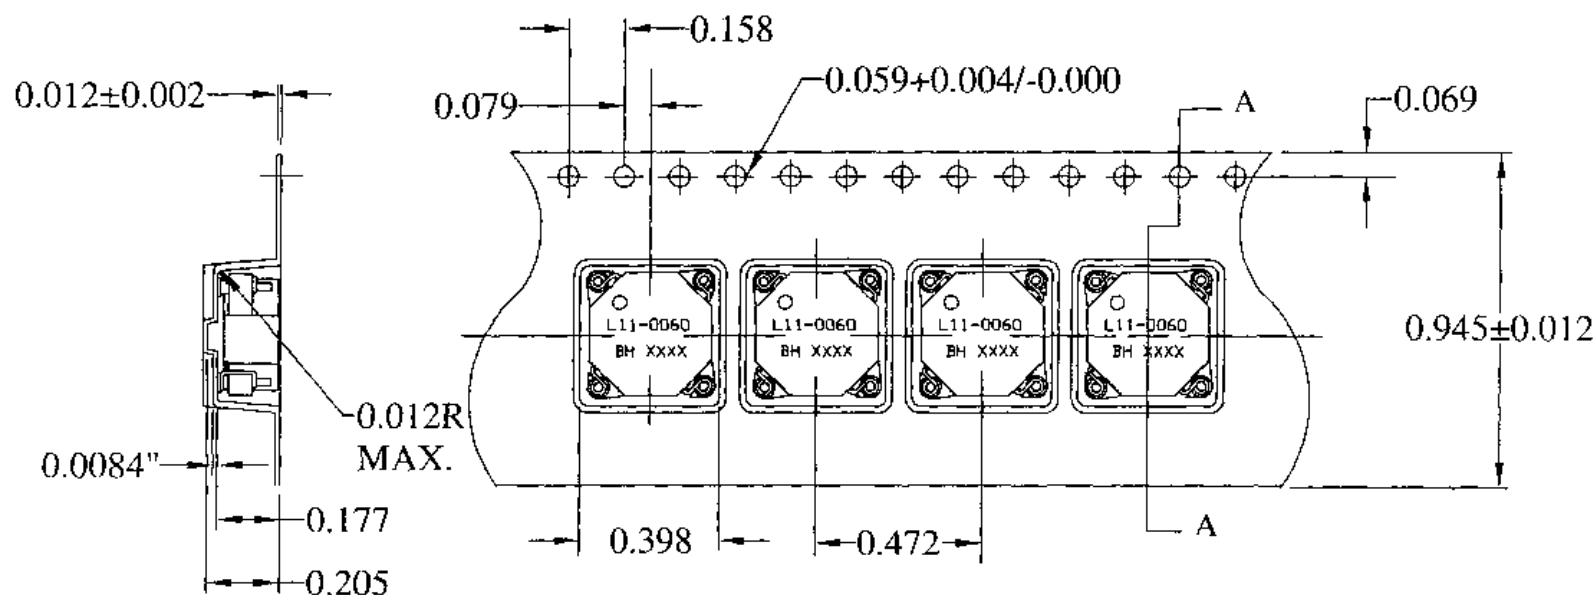

CARRIER TAPE 811-0187

				DESIGN PER:	BH CATALOG ☐ CUSTOM NON-PROPRIETARY ☒		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics		
				DRAWN:				K. LOFTUS	
				ENGR:	J. DECRAMER		TITLE:	INDUCTOR	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005				PART NO.	L11-0060
A	11-26-08	CUSTOMER PRINT (Q12506)							
ISSUE	DATE	REVISION		BY	PAGE 2 OF 2				