




MECHANICAL

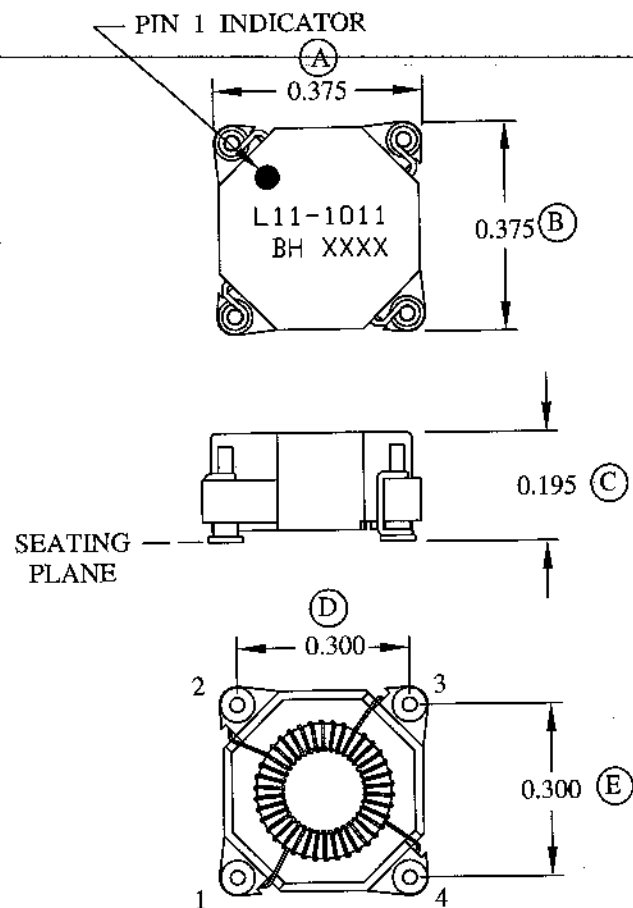

FOOTPRINT

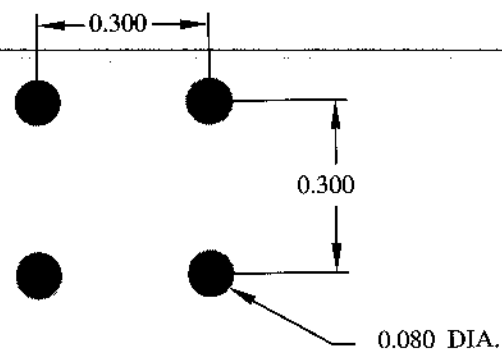

SCHEMATIC

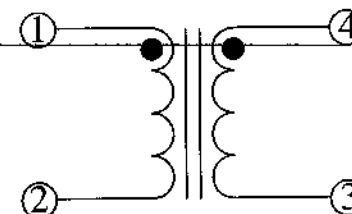

ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 3.17-4.76 μ H

10 KHz 100mV

DC BIAS: 3.17 μ H TYP. @ 3.04 ADC (1-2)


10 KHz 100mV

DC RESISTANCE: (1-2 OR 3-4) 0.028 OHMS NOM.

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	9-8-05	CUSTOMER PRINT			PART NO. L11-1011
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

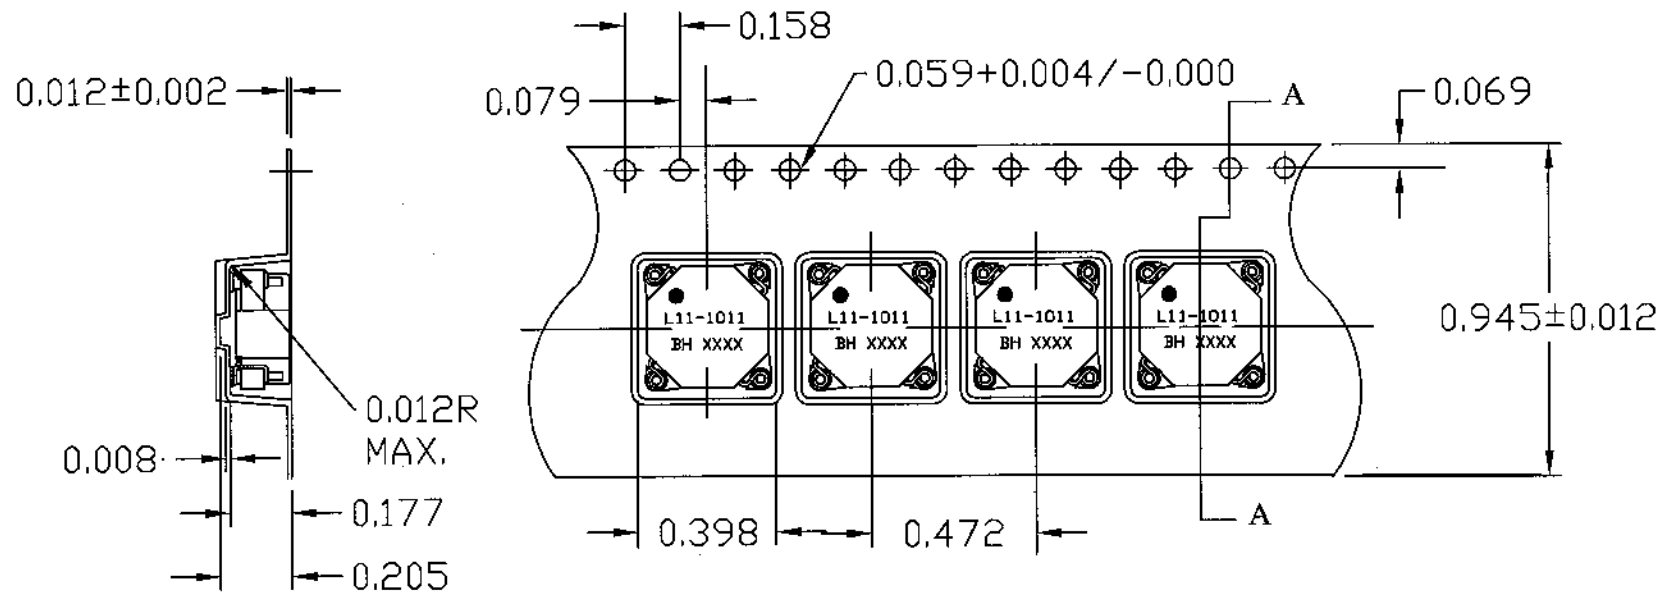

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	9-8-05	CUSTOMER PRINT			PART NO. L11-1011
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	