

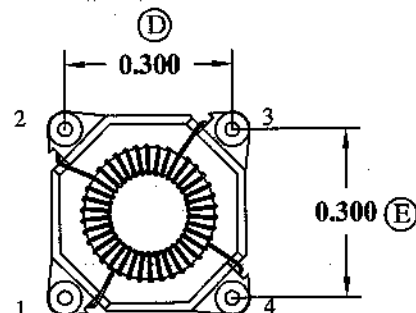
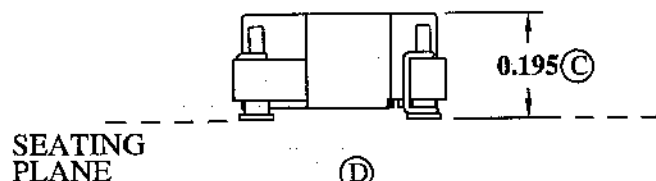


MECHANICAL

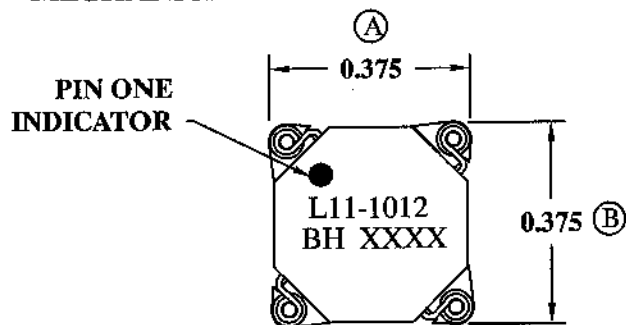


COPLANARITY TM0070

SUGGESTED PAD LAYOUT

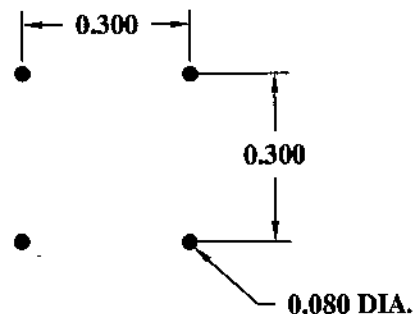

SCHEMATIC



ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 4.96-7.44 μ H (1-2)

10 KHz 100mV

DC BIAS: 4.96 μ H TYP. @ 2.43 ADC (1-2)


10 KHz 100mV

DC RESISTANCE: 0.046 OHMS NOM. (1-2) OR (3-4)

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				BH CATALOG		
				☐ CUSTOM ☒ NON-PROPRIETARY		TITLE: INDUCTOR PART NO. L11-1012
				DRAWN: K. LOFTUS		
				ENGR: J. DECRAMER		
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		
A	6-15-05	CUSTOMER PRINT		PAGE 1 OF 2		
ISSUE	DATE	REVISION	BY			

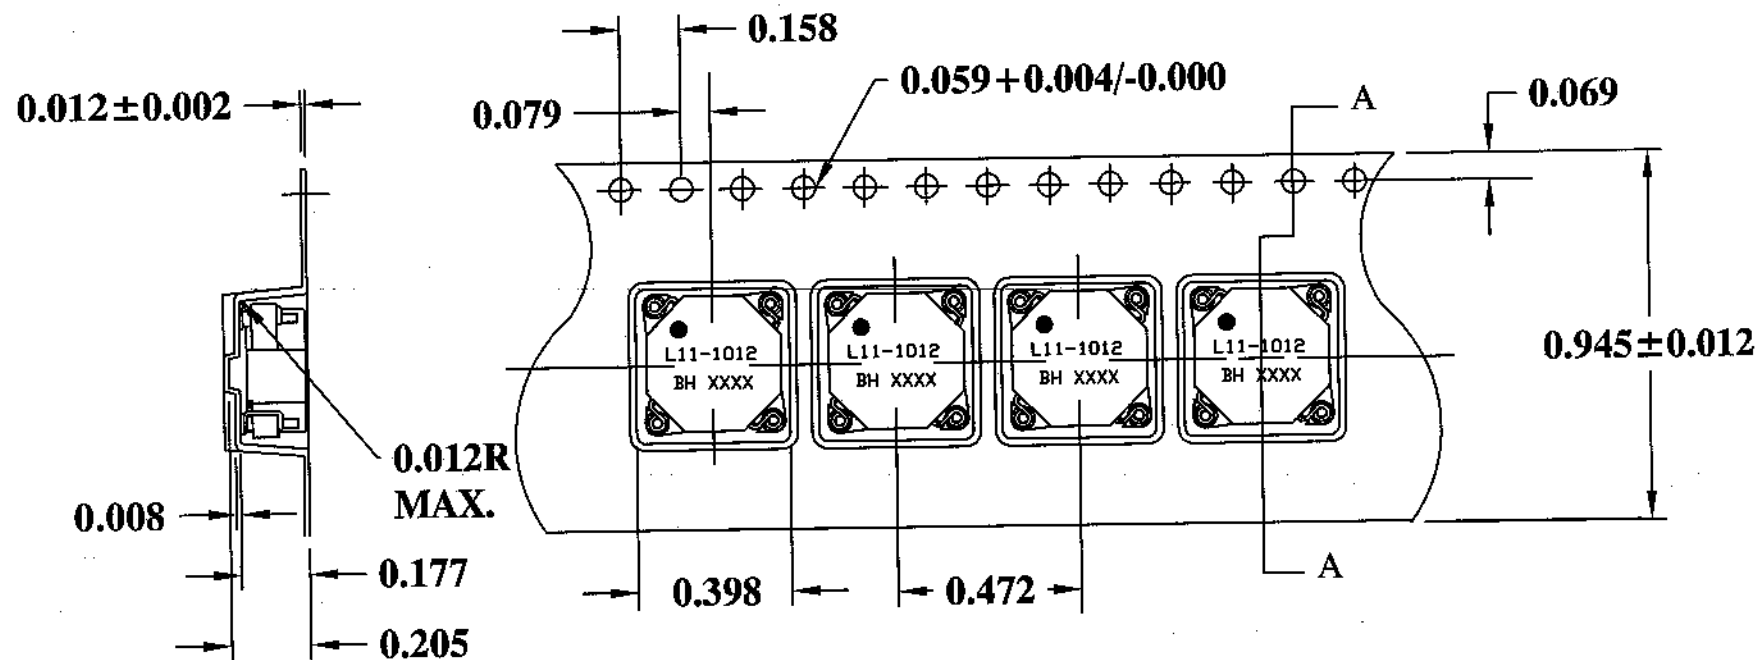

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics		
				BH CATALOG			
				☐ CUSTOM ☒ NON-PROPRIETARY			
				DRAWN: K. LOFTUS			
				ENGR: J. DECRAMER		TITLE:	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO.	
				PAGE 2 OF 2			
A	6-15-05	CUSTOMER PRINT		L11-1012			
ISSUE	DATE	REVISION	BY				