

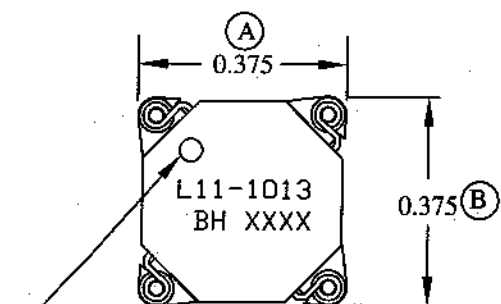



MECHANICAL

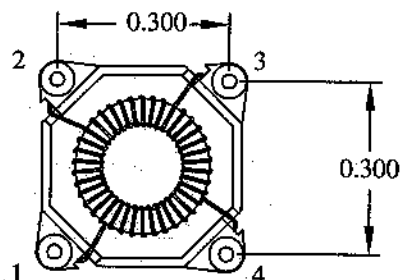


PIN 1 INDICATOR

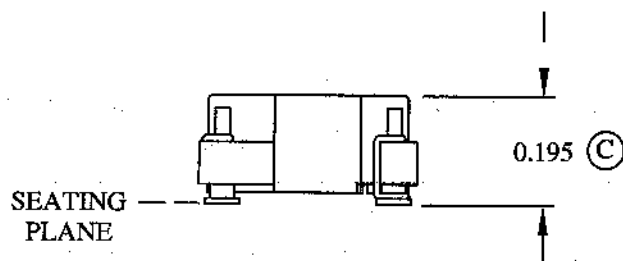

FOOTPRINT

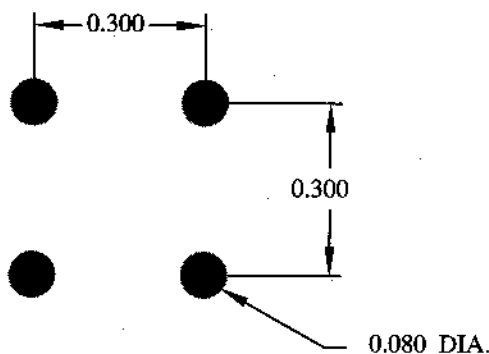

SCHEMATIC

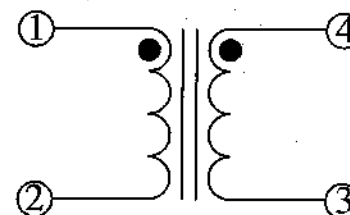

ELECTRICAL SPECIFICATIONS

URNS RATIO : 1:1

OPEN CIRCUIT INDUCTANCE: 8.93uH $\pm$ 20% @ 0 ADC (1-2)


7.14uH TYP. @ 2.03 ADC (1,4-2,3)

DC RESISTANCE: (1-2 OR 3-4) 0.068 OHMS NOM.

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				BH CATALOG			
				☐ CUSTOM ☒ NON-PROPRIETARY		TITLE: INDUCTOR	
				DRAWN: K. LOFTUS ENGR: J. DECRAMER			
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES .XX $\pm$.01 .XXX $\pm$.005		PART NO. L11-1013	
				PAGE 1 OF 2			
A	8-1-05	CUSTOMER PRINT					
ISSUE	DATE	REVISION	BY				

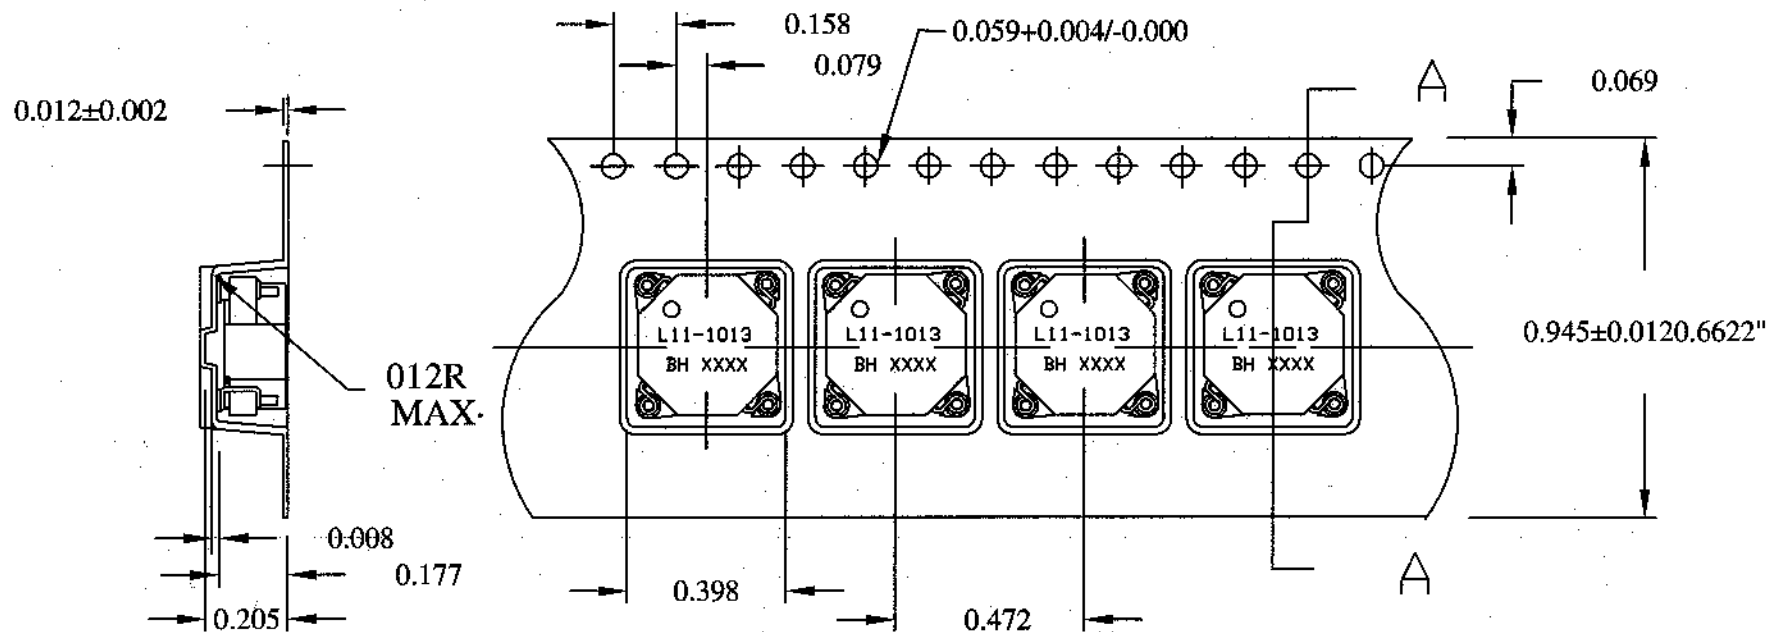

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				☐ CUSTOM ☐ NON-PROPRIETARY ☒ X	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	TITLE: INDUCTOR
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE XX±.01 XXX±.005	
A	8-1-05	CUSTOMER PRINT	<i>[Signature]</i>		PART NO. L11-1013
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	