

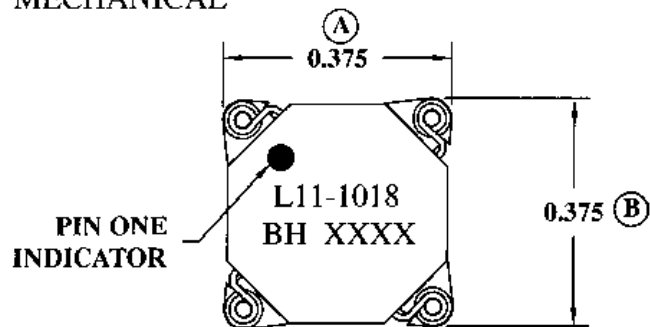



MECHANICAL

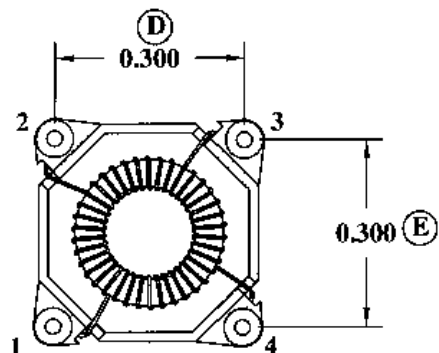


NOTE: LABEL MUST NOT EXTEND OVER EDGES OF CASE.

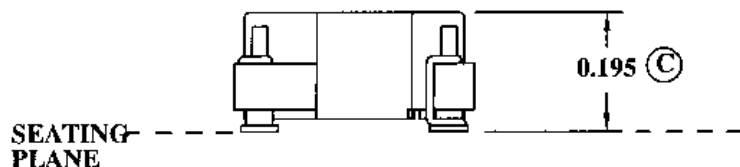

RECOMMENDED PC BOARD LAYOUT

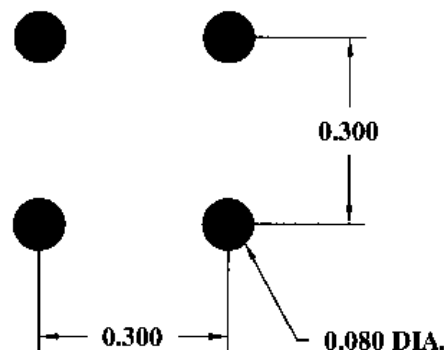

SCHEMATIC

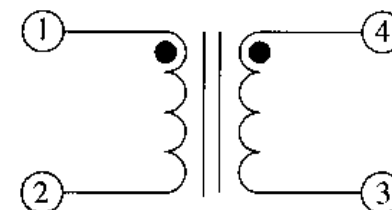

ELECTRICAL SPECIFICATIONS

TURNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 30μH ±20% @ 0 ADC (1-2)

24.0μH TYP. @ 1.11 ADC (1-2)


10 KHz 100mV

DC RESISTANCE: 0.1980 OHMS NOM. (1-2) (3-4)

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	9-8-05	CUSTOMER PRINT			PART NO. L11-1018
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

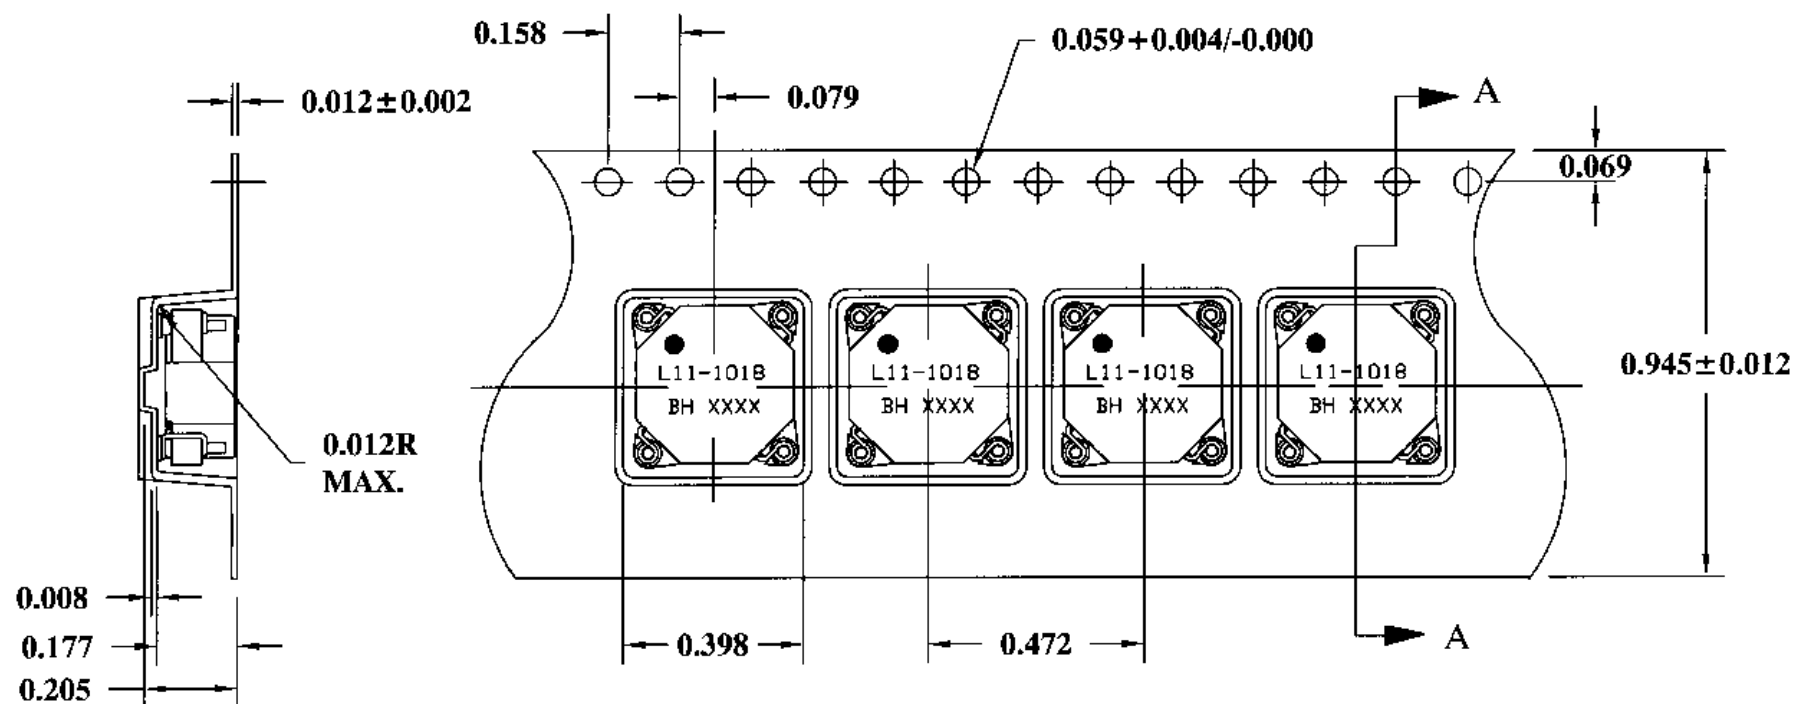

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				DRAWN: K. LOFTUS	TITLE: INDUCTOR
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES. TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	PART NO. L11-1018
A	9-8-05	CUSTOMER PRINT		PAGE 2 OF 2	
ISSUE	DATE	REVISION	BY		