






MECHANICAL

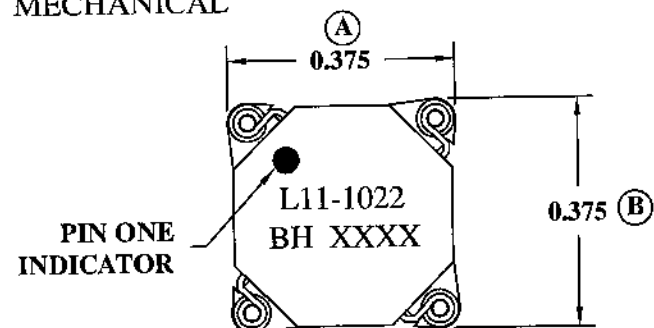

RECOMMENDED PC BOARD LAYOUT

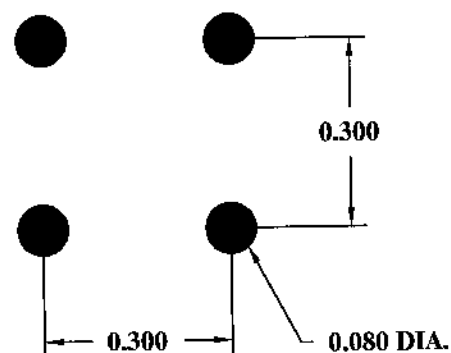

SCHEMATIC

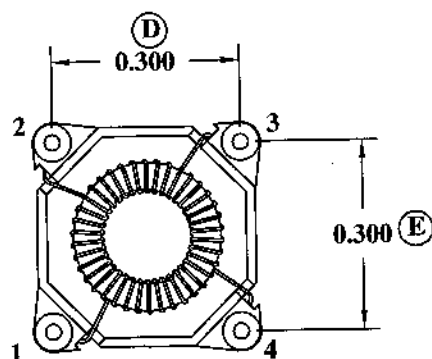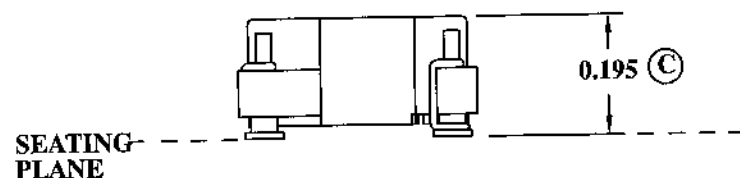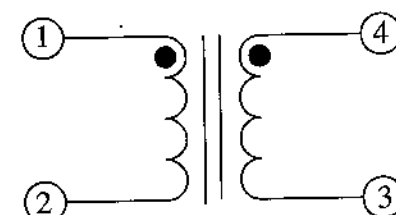


ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 55.80 μ H $\pm$ 20% @ 0 ADC (1-2)
44.65 μ H TYP. @ 0.81 ADC (1-2)
10 KHz 100mV

DC RESISTANCE: 0.434 OHMS NOM. (1-2) (3-4)
IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	CATALOG CUSTOM NON-PROPRIETARY X	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				DRAWN: K. LOFTUS		
				ENGR: J. DECRAMER		
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		
A	8-23-05	CUSTOMER PRINT				TITLE: INDUCTOR
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2		PART NO. L11-1022

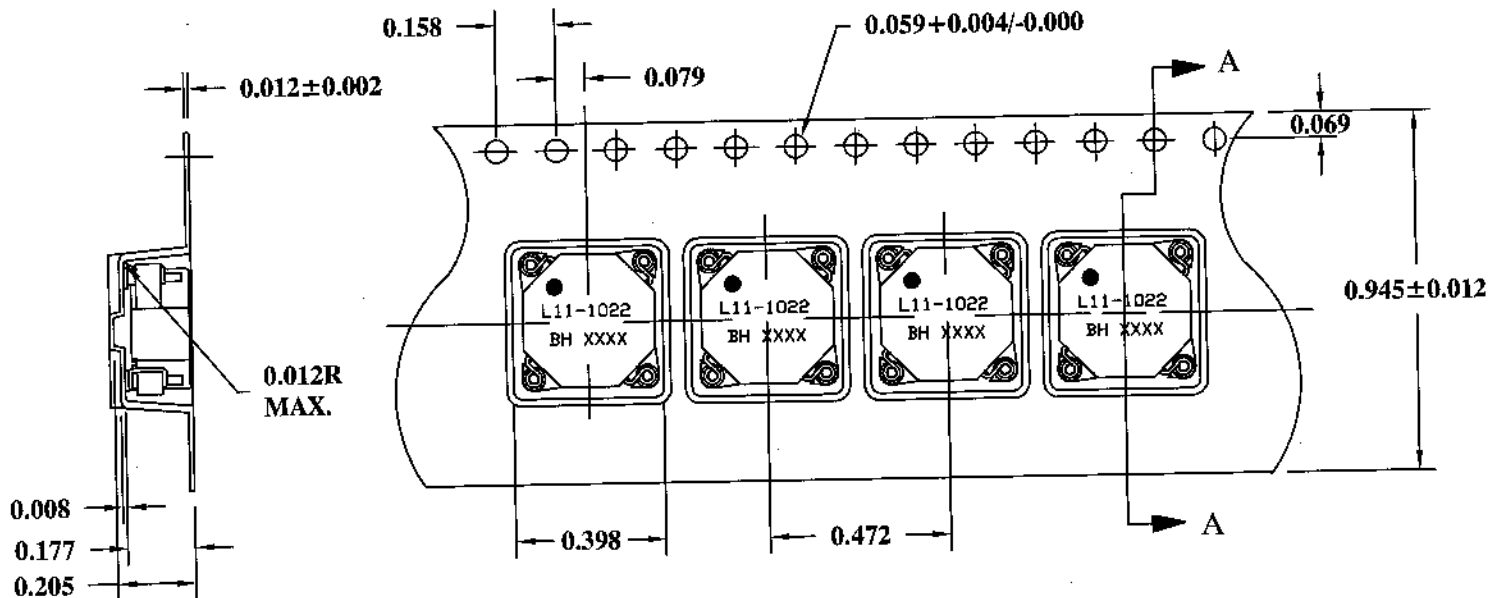

CARRIER TAPE 811-0187

				DESIGN PER:	CATALOG		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				☐ CUSTOM			
				DRAWN: K. LOFTUS		TITLE: INDUCTOR	
				ENGR: J. DECRAMER			
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005			
A	8-23-05	CUSTOMER PRINT		PAGE 2 OF 2			
ISSUE	DATE	REVISION	BY				