

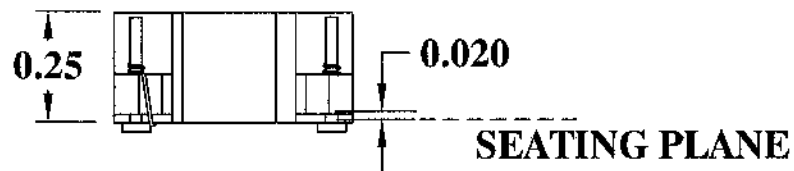



MECHANICAL

PIN 1 MARKING

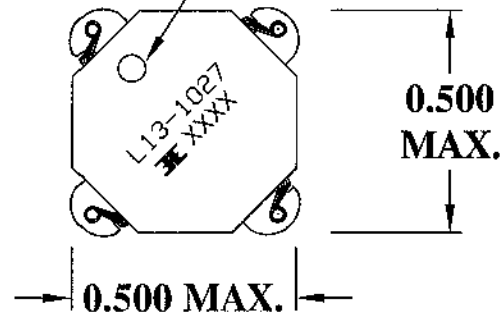


△ COPLANARITY TM0070

RECOMMENDED PC BOARD LAYOUT

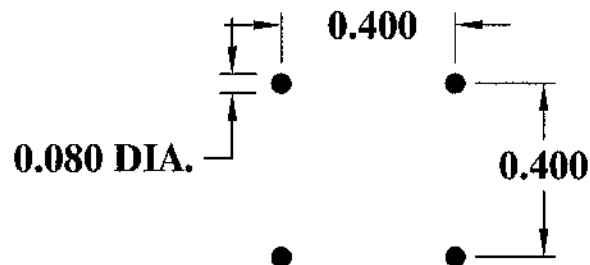

SCHEMATIC



ELECTRICAL SPECIFICATIONS

TURNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 57.5 - 70.3μH (1-2)

10 KHz 100mV


DC BIAS: 39.6μH TYP. @ 2.32 ADC (1, 4 - 2, 3)

10 KHz 100mV

DC RESISTANCE: 0.5659 OHMS MAX. (1-2) (4-3)

IR: 100 VDC (1-4) 1K MEGOHMS MIN.

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				☐ CUSTOM NON-PROPRIETARY ☒	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	TITLE: QTR PAK™ (Switching Regulator)
A	2-1-06	CUSTOMER PRINT	JCC	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

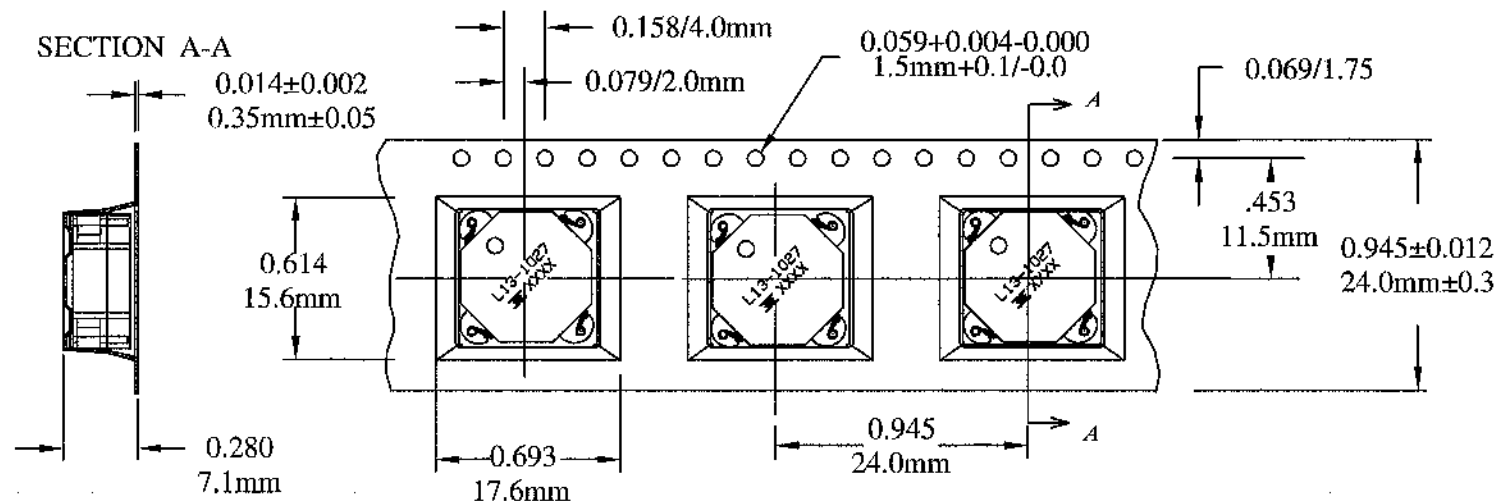

CARRIER TAPE 811-0137

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				☐ CUSTOM ☒ NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	TITLE: QTR PAK™ (Switching Regulator)
A	2-1-06	CUSTOMER PRINT	<i>gdl</i>	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES .XX±.01 .XXX±.005	PART NO. L13-1027
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	