




MECHANICAL

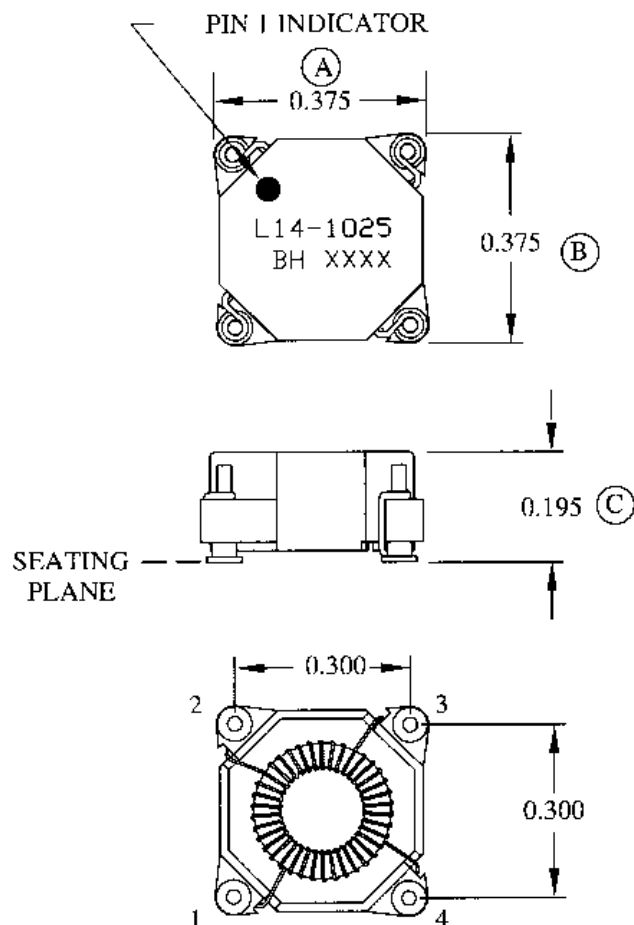

FOOTPRINT

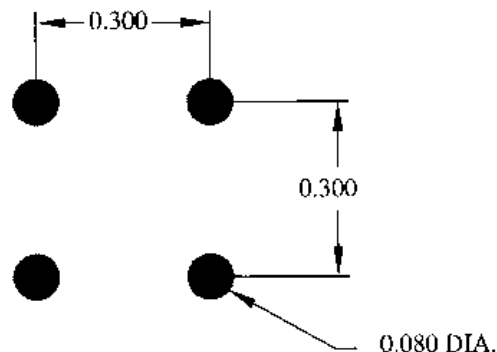

SCHEMATIC

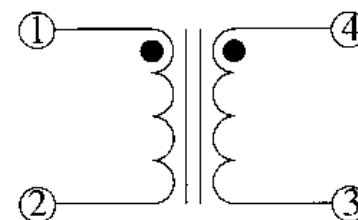

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1


OPEN CIRCUIT INDUCTANCE: $8.23\mu\text{H} \pm 10\%$ @ 0 ADC (1, 4 - 2, 3)
10 KHz 50mV

DC BIAS: $5.35\mu\text{H}$ TYP. @ 3.46 ADC (1, 4 - 2, 3)
10 KHz 50mV

DC RESISTANCE: 0.056 OHMS NOM. (1, 4 - 2, 3)

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

				DESIGN PER:	 [®] BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG ☐ CUSTOM NON-PROPRIETARY ☒	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE XX±.01 XXX±.005	
A	2-6-09	CUSTOMER PRINT			
ISSUE	DATE	REVISION	BY		
				PAGE 1 OF 2	
					TITLE: INDUCTOR
					PART NO. L14-1025

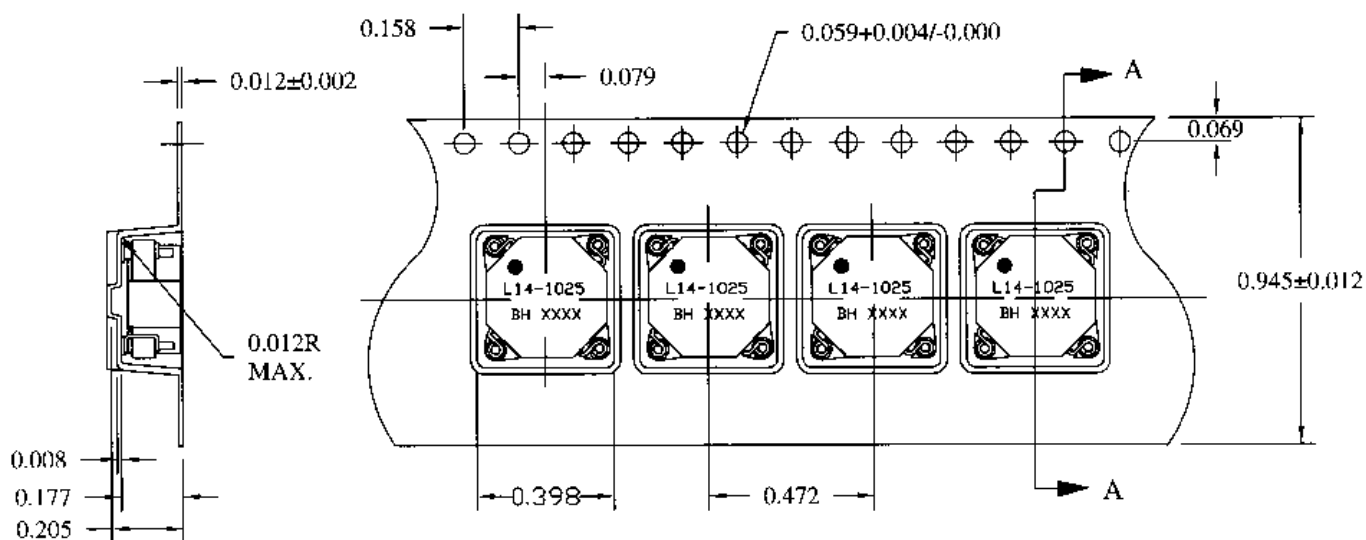

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				CUSTOM NON-PROPRIETARY ☒	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	2-6-09	CUSTOMER PRINT			PART NO. L14-1025
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	