



MECHANICAL

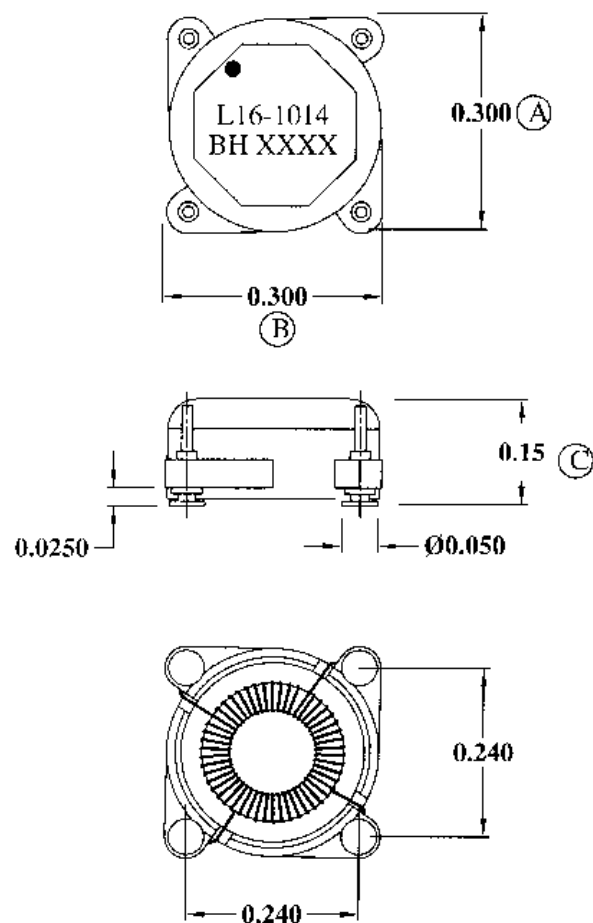


COPLANARITY 0.004 MAX.

SUGGESTED PAD LAYOUT

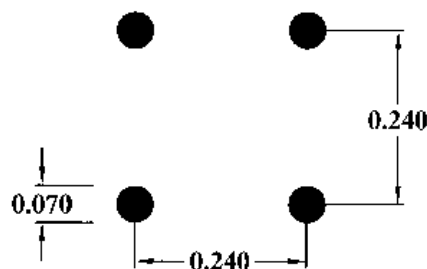

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 9.80 μ H $\pm$ 20% @ 0 ADC

(1-2) (SH 1, 4) (SH 2, 3) 10 KHz 100mV

DC BIAS: 7.84 μ H TYP. @ 2.47 ADC (1-2) (SH 1, 4) (SH 2, 3)

10 KHz 100mV

DC RESISTANCE: 0.102 OHMS NOM. (1-2) (SH 1, 4) (SH 2, 3)

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS COMPLIANT

				DESIGN PER:	BH CATALOG	 ^(R) BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN ^(C) 1998 BH Electronics
				☐ CUSTOM	NON-PROPRIETARY ☒	
				DRAWN:	K. LOFTUS	
				ENGR:	J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		TITLE:
A	8-16-07	CUSTOMER PRINT				PART NO.
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1		L16-1014