

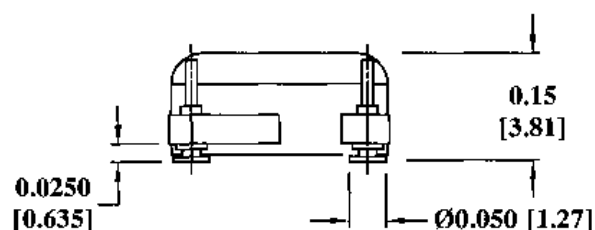



MECHANICAL

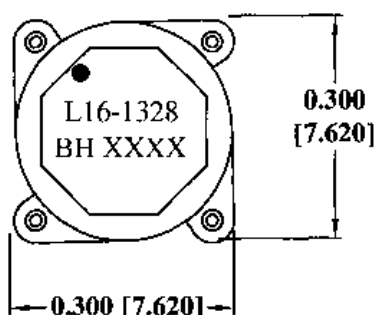


COPLANARITY 0.004 MAX.

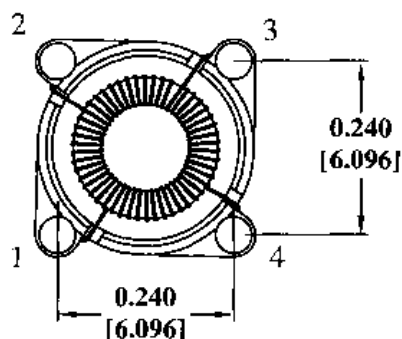

SUGGESTED PAD LAYOUT

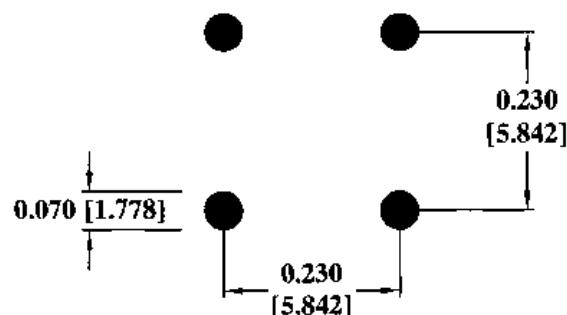

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 42.3μH±20% @ 0 ADC (1, 4 - 2, 3)
10 KHz 100mV

DC BIAS: 33.8μH TYP. @ 1.19 ADC (1, 4 - 2, 3)

PRIMARY LEAKAGE INDUCTANCE: 0.4μH NOM.
10 KHz 100mV

DC RESISTANCE: 1.54 OHMS NOM. (1, 4 - 2, 3)

HIGH VOLTAGE TEST: 1500 VAC (1-4)

RoHS COMPLIANT

				DESIGN PER:	CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				☐ CUSTOM	NON-PROPRIETARY ☒	
				DRAWN:	K. LOFTUS	
				ENGR:	J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		TITLE:
						INDUCTOR
						PART NO.
						L16-1328
A	2-5-13	CUSTOMER PRINT	BY			
ISSUE	DATE	REVISION	BY			