

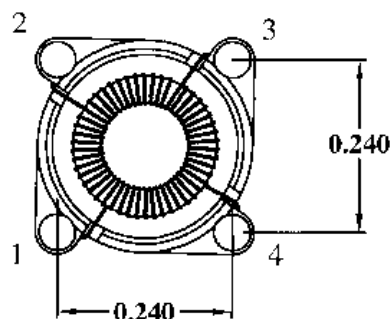
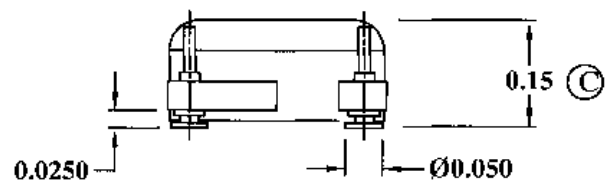


MECHANICAL

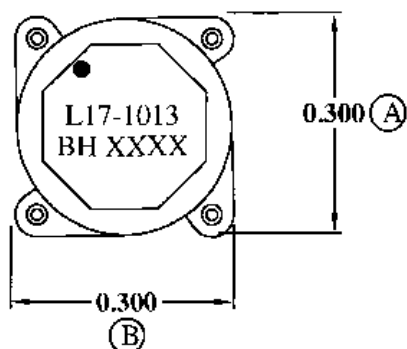


COPLANARITY 0.004 MAX.

SUGGESTED PAD LAYOUT

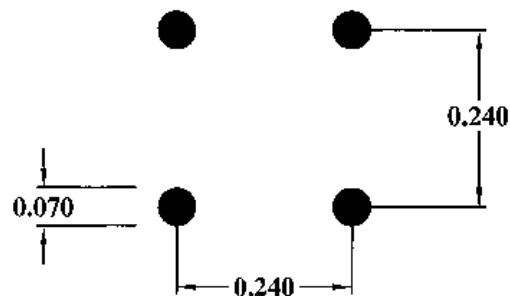

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 7.49 μ H $\pm$ 10% @ 0 ADC (1, 4 - 2, 3)
10 KHz 10mV

DC BIAS: 4.87 μ H TYP. @ 2.58 ADC (1, 4 - 2, 3)
10 KHz 10mV

DC RESISTANCE: 0.093 OHMS MAX. (1, 4 - 2, 3)

IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS COMPLIANT

				DESIGN PER:	BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				☐ CUSTOM	NON-PROPRIETARY ☒		
				DRAWN:	K. LOFTUS		
				ENGR:	J. DECRAMER		
B	10-21-13	PAD LAYOUT		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		TITLE:	INDUCTOR
A	10-22-07	CUSTOMER PRINT	JDC			PART NO.	L17-1013
ISSUE	DATE	REVISION	BY			PAGE 1 OF 1	